

USFG 12-150(12V150AH)

Applications

- ◆ Telecom application (indoor or outdoor BTS)
(21"/23" rack or cabinet)
- ◆ Solar System
- ◆ Wind system
- ◆ Hybrid solution



Design

- ◆ Positive plate: flat plate and grid-plate in PbCaSn-alloy
- ◆ Negative plate: flat plate and grid-plate in PbCaSn-alloy with long life expander material
- ◆ Electrolyte: sulphuric acid, fixed as GEL by fumed silica
- ◆ Separator: high quality microporous separator
- ◆ Safety valve: valve with flame arrestor


Features

- ◆ Long life: 16 years design life
- ◆ Good deep discharge resilience performance
- ◆ Special plate design, long cycle lifetime
- ◆ High thermal capacity, reduce the risk of thermal out of control and drying hard, can be used in bad environment
- ◆ Flame retardant container UL94-V0

Terminal




Terminal Model: T13

Unit: mm



Layout

Unit: mm

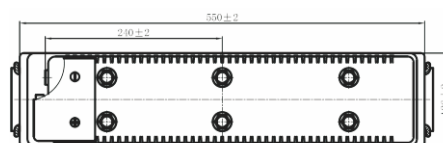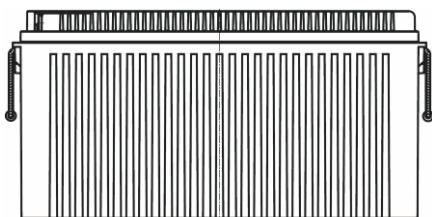

Front Terminal GEL Battery-USFG Series

Specification

Nominal Voltage	12V	
Rated Capacity (Ah)	150.0 AH/15.0A	(10hr, 1.80V/cell, 25°C)
	114.6 AH/38.2A	(3hr, 1.75V/cell, 25°C)
	87.0 AH/87.0A	(1hr, 1.60V/cell, 25°C)
Dimension	Length	550 ± 2mm
	Width	126 ± 2mm
	Container Height	280 ± 2mm
	Total Height	280 ± 2mm
Approx Weight	Approx 52.0 kg	
Terminal	T13	
Container Material	ABS	
Max. Discharge Current	1500A (5s)	
Internal Resistance	Approx 3.0mΩ	
Operating Temp. Range	Discharge: -20~55°C Charge: 0~40°C Storage: -20~50°C	
	40°C	103%
	25°C	100%
Capacity Affected by Temperature	0°C	86%
	Initial Charging Current less than 39.5 A.	
Cycle Use	Voltage: 14.4V at 25°C	Temp. coefficient -30mV/°C
	Equalization voltage: 14.1V at 25°C Temp. coefficient -18mV/°C	
Standby Use	Float voltage: 13.5V at 25°C	Temp. coefficient -18mV/°C
	USFG series batteries may be stored for up to 9 months at 25°C and then a freshening charge is required.	
Self Discharge	For higher temperatures the time interval will be shorter.	



ISO9001



ISO14001

Performance

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	125.8	98.7	75.3	63.2	44.3	33.8	28.0	24.1	20.5	18.2	16.4	15.0	14.3	7.59
1.80V/cell	144.0	110.3	83.0	69.7	47.9	36.2	29.6	25.4	21.6	19.0	17.2	15.8	15.0	7.90
1.75V/cell	161.9	121.3	89.8	74.6	50.8	38.2	31.0	26.4	22.3	19.7	17.7	16.2	15.3	8.06
1.70V/cell	174.4	129.9	95.3	79.0	53.9	39.8	32.1	27.2	23.1	20.4	18.3	16.7	15.6	8.16
1.67V/cell	181.5	135.0	98.7	81.9	55.3	41.1	32.9	27.7	23.5	20.7	18.5	16.9	15.8	8.24
1.60V/cell	196.7	144.5	106.0	87.0	57.5	42.7	34.1	28.6	24.1	21.1	18.9	17.2	16.1	8.36


Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	20min	30min	45min	1h	2h	3h	4h	5h	6h	7h	8h	9h	10h	20h
1.85V/cell	240.7	190.2	146.0	123.0	86.6	66.1	55.0	47.7	40.7	36.1	32.6	29.9	28.6	15.1
1.80V/cell	272.1	210.5	159.5	135.0	93.2	70.6	58.1	49.9	42.6	37.7	34.1	31.3	29.8	15.7
1.75V/cell	302.4	229.0	170.9	143.8	98.5	74.4	60.6	51.6	43.9	38.9	35.1	32.2	30.3	16.0
1.70V/cell	322.2	243.6	180.8	151.6	104.0	77.3	62.5	53.1	45.4	40.1	36.1	33.0	31.0	16.2
1.67V/cell	331.6	249.7	185.6	156.1	106.1	79.4	63.8	54.0	46.0	40.6	36.6	33.4	31.3	16.4
1.60V/cell	355.4	265.6	198.3	164.9	109.9	82.2	66.0	55.5	47.0	41.4	37.1	34.1	31.9	16.6


Front Terminal GEL Battery-USFG Series

Characteristic Curve


Discharge Characteristics

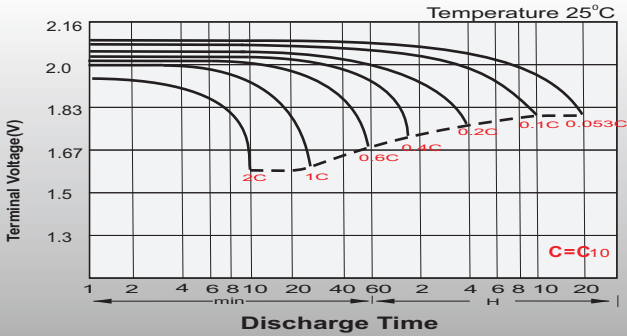


Float Charging Characteristics

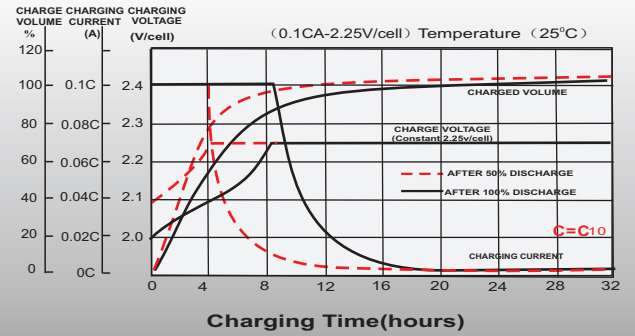


Temperature Effects in Relation to Battery Capacity

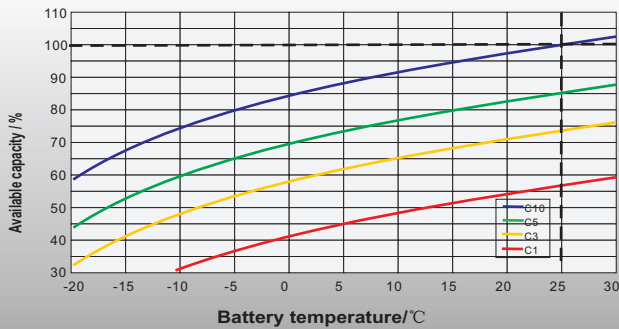

Effect of Temperature on Long Term Float Life

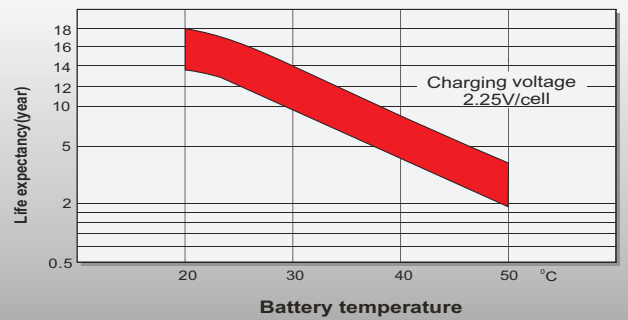

Cycle Life in Relation to Depth of Discharge

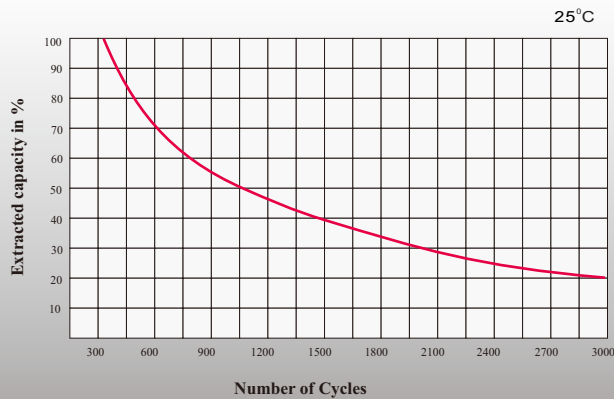

General Relation of Capacity VS. Storage Time

